

Trash Pumps

**MP482T
MP703T/MP703TE
MP1004T/MP1004TE**




Standard Features

- Powder-coated Frame
- Auto-return decompression for efficient starting at all temperature conditions
- Solid handling capacity up to 1/2 the intake diameter
- Cast iron impeller & volute

Options

- Cam-lock fitting
- Low oil shutdown on electric start only
- 10" pneumatic wheel kit
- 16" pneumatic wheel kit

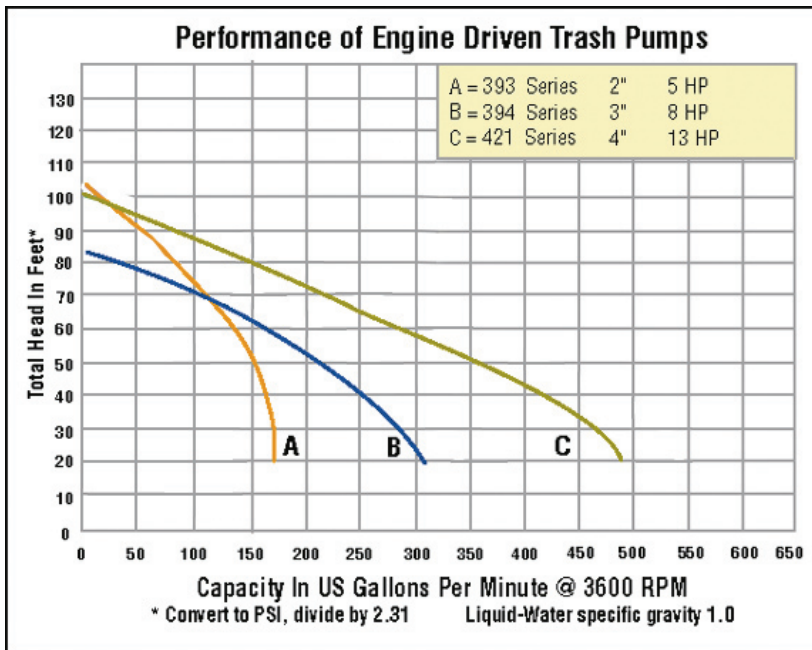

Specifications			
Pump	AMT		
Construction	2" Die Cast Aluminum	3" Die Cast Aluminum	4" Die Cast Aluminum
Seals	Self-lubricating mechanical seals		
Seal Faces	Silicon carbon-ceramic		
Output	2" 180 gpm 94 ft. total head	3" 315 gpm 89 ft. total head	4" 500 gpm 120 ft. total head
Size	2" x 2" (suction & discharge)	3" x 3" (suction & discharge)	4" x 4" (suction & discharge)
Lift	Up to 20'		
Engine			
Yanmar Model	L48V6MF1F1AA	L70V6DF1F11AA L70V6DA1F1AA	L100V6DF1F1AA L100V6DA1F1AA
Max Output	4.7 hp @ 3600 rpm	6.4 hp @ 3600 rpm	9.1 hp @ 3600 rpm
Operation Capacity	Approximately 3-4 hours		
Package			
Weight	129 lbs	199 lbs • 215 lbs electric	259 lbs • 276 lbs electric
L x W x H	24" x 19" x 24"		27" x 21" x 24"

MAS POWER

www.maspowerproducts.com
7177 30th Ave North • St. Petersburg, Florida 33710
Tel. 727.522.9471 • Fax 727.381.3235
For Georgia & Alabama 229.347.8394
Toll Free 800.545.4574